


# DS-2CC5192P(N) Low Light Dome Camera

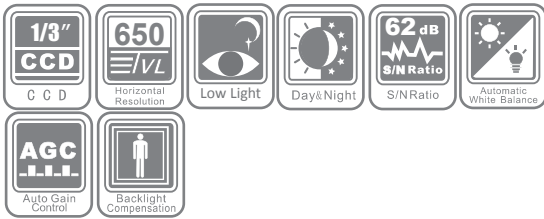

## Key Features

- 1/3" Sony EXVIEW HAD CCD II
- 650 TVL high resolution
- Super low illumination
- Day / night auto switch
- 3-axis adjustment
- Compact design

## Specifications

|                       | DS-2CC5192P(N)                                                                                              |
|-----------------------|-------------------------------------------------------------------------------------------------------------|
| <b>Camera</b>         |                                                                                                             |
| Image sensor          | 1/3" Sony EXVIEW HAD CCD II                                                                                 |
| Signal system         | PAL / NTSC                                                                                                  |
| Effective pixels      | PAL: 976 (H) × 582 (V)<br>NTSC: 976 (H) × 494 (V)                                                           |
| Min. illumination     | 0.001 lux@F1.2, AGC on<br>0.0028 lux@F2.0, AGC on                                                           |
| Shutter time          | PAL: 1/50s ~ 1/100,000s<br>NTSC: 1/60s ~ 1/100,000s                                                         |
| Lens                  | 3.6mm @F2.0 (2.8mm, 6mm, 8mm, 12mm, 16mm optional)<br>Angle of view: 78° (3.6mm)                            |
| Lens mount            | M12                                                                                                         |
| Angle adjustment      | Pan: 0 ~ 355°, tilt: 0 ~ 90°, rotation: 0 ~ 355°                                                            |
| Day & night           | Electronic                                                                                                  |
| Horizontal resolution | 650 TVL                                                                                                     |
| Synchronization       | Internal synchronization                                                                                    |
| Video output          | 1Vp-p composite output (75 Ω / BNC);<br>Test monitor out [1Vp-p composite output (75 Ω / BNC), device line] |
| S/N ratio             | More than 62 dB                                                                                             |
| <b>General</b>        |                                                                                                             |
| Operating conditions  | -10°C ~ 60°C (14°F ~ 140°F)<br>Humidity 90% or less (non-condensing)                                        |
| Power supply          | 12 VDC ± 10%                                                                                                |
| Power consumption     | 2W max.                                                                                                     |
| Dimensions            | Φ 97.8 x 64.4 mm (Φ 3.85" x 2.54")                                                                          |
| Weight                | 300g (0.66 lbs)                                                                                             |

## Available models

DS-2CC5192P, DS-2CC5192N

## Dimensions

