

## DS-K2M060

### Secure Door Control Unit

DS-K2M060 Secure Door Control Unit is the interlayer between the access control terminal and the lock, including the door magnetic, the lock, the exit button and so on. It can be applied to keep the door closed when the door is damaged.




#### AVAILABLE MODELS

DS-K2M060

#### MAIN FEATURES

- Communicates with the access control terminal via RS-485 to execute the commands from the terminal including open door, close door, normally open and normally closed
- Collects the door magnetic signal, the exit button signal and the tamper-proof signal and send them to the access control terminal
- Supports tampering Alarm
- Supports RS-485 communication indicators to show the communication status
- 4-ch DIP switch supporting ID NO. configuration
- Supports a Wiegand interface to connect a Wiegand card reader to enter/exist access control terminal by swiping card

**TYPICAL APPLICATION**

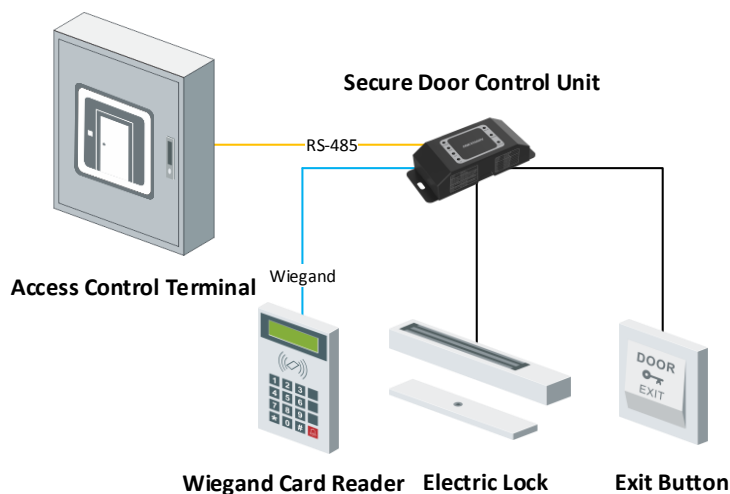

**SPECIFICATION**

Model	DS-K2M060
Communication Interface	RS-485
Input / Output Interface	Exit Button*1, Lock*1, Door Magnetic*1, Alarm Out*1 and Wiegand*1
Indicator	7 Indicators (RS-485 Communication Status*2, Power Supply*1, Exit Button*1, Lock Status*1, Door Magnetic*1 and Running Status*1)
Power Supply	DC 12V
Working Temperature	-30°C to +55°C (-22°F to 131°F)
Working Humidity	10% to 90% (Non Condensing)
Dimensions	48×115×25mm (1.89×4.53×0.98inch)
Installing Method	Wall Mounting