

DS-2CE56D1T-IRM
HD1080P IR Turret Camera



Key Features

- 2 Megapixel high-performance CMOS
- Analog HD output, up to 1080P resolution
- True Day/Night, Smart IR
- Up to 20m IR distance
- IP66 weatherproof
- OSD menu
- Up the Coax(HIKVISION-C)




Specifications

| Camera | |
|-----------------------------------|---|
| Image Sensor | 2MP CMOS Image Sensor |
| Signal System | PAL/NTSC |
| Effective Pixels | 1984(H)*1105(V) |
| Min. illumination | 0.01 Lux @ (F1.2,AGC ON),0 Lux with IR |
| Shutter Time | 1/25(1/30)s to 1/50,000s |
| Lens | 2.8mm, 3.6mm, 6mm optional |
| | Angle of View: 105.8°(2.8mm), 84.3°(3.6mm), 55.4°(6mm) |
| Lens Mount | M12 |
| Day & Night | ICR |
| Angle Adjustment | Pan: 0 - 360°, Tilt: 0 - 75°, Rotation: 0 - 360° |
| Synchronization | Internal synchronization |
| Video Frame Rate | 1080p@25fps/1080p@30fps |
| HD Video Output | 1 Analog HD output |
| S/N Ratio | >62dB |
| Menu | |
| AGC | High/Medium/Low/Off |
| D/N Mode | Smart IR/Color/BW |
| White Balance | Auto/Manual |
| BLC (Backlight Compensation) | Support |
| DWDR (Digital Wide Dynamic Range) | Support |
| Language | English |
| Functions | Digital noise reduction, Mirror |
| General | |
| Operating Conditions | -40 °C – 60 °C (-40 °F – 140 °F), Humidity 90% or less (non-condensing) |
| Power Supply | 12 VDC ± 15% |
| Power Consumption | Max. 4W |
| Protection Level | IP66 |
| IR Range | Up to 20m |
| Communication | Up the coax, Protocol: HIKVISION-C(TVI output) |
| Dimensions | Φ89.5 × 59.1 mm(Φ3.52" × 2.75") |
| Weight | 340 g |

Order Models

DS-2CE56D1T-IRM

Dimensions

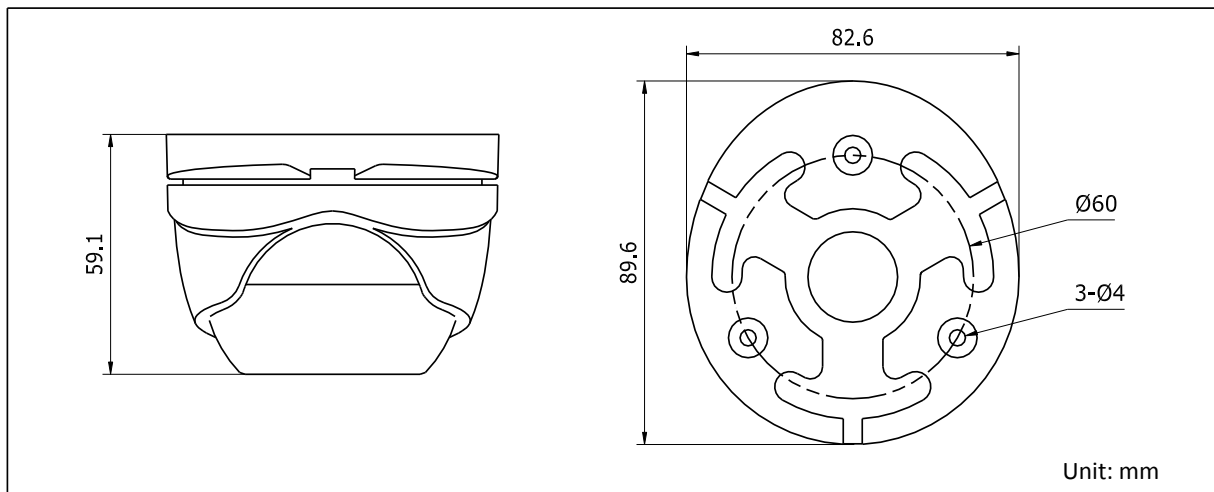

Accessories



DS-1272ZJ-110-TRS
Wall Mounting



DS-1275ZJ
Vertical Pole Mounting



DS-1276ZJ
Corner Mounting



DS-1H18
Video Balun



X41T
Camera Tester



DS-1280ZJ-XS
Junction box

Distributed by

1  **NET TRADING SRL**
IMPORTATOR SISTEME DE SECURITATE
CCTV  0736 355 553, 0736 355 554, 0722 334 700



Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision Poland
T +48-22-460-01-50
poland@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision UK
T +44-1628-9021-4
support.uk@hikvision.com

Hikvision Europe
T +31-23-5542770
saleseuro@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Middle East
T +971-4-8816086
salesme@hikvision.com

Hikvision France
T +33(0)1-85-330-444
info.fr@hikvision.com

Hikvision Oceania
T +61-2-8599-4233
salesau@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Hong Kong
T +852-2151-1761